


OPEN




DESIGNATION

Blank= No Guard

DESCRIPTION

For maximum light output

FROSTED ACRYLIC LENS

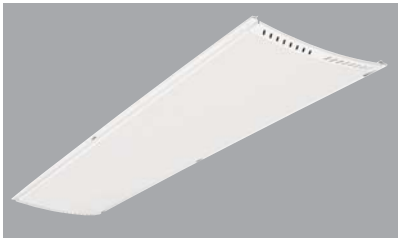


DESIGNATION

I5-FRM/FL= Frosted Acrylic Lens & Frame (use with general distribution reflector, I5 only)
I5-FRM/CL= Clear Acrylic Lens & Frame (use with general distribution reflector, I5 only)

DESCRIPTION

In white doorframe w/"Herringbone" patterned end rail

HEAVY DUTY WIREGUARD

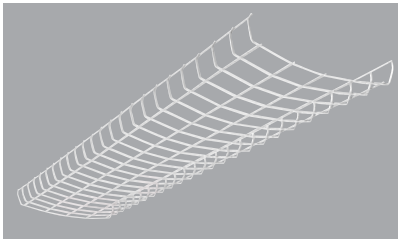


DESIGNATION

I5/WG= Heavy Duty Wireguard

DESCRIPTION

Finished in white. Can be used alone or in combination with other shielding

TBW

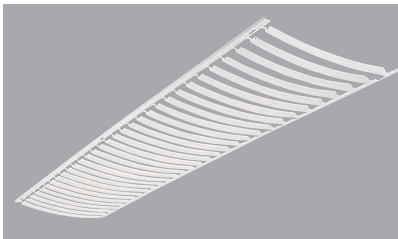

DESIGNATION

I5/TBW= Thin White Baffle (for I5)
I8/TBW= Thin White Baffle (for I8)

DESCRIPTION

Thin Blade White Baffle w/23° longitudinal shielding

ASYMMETRIC LOUVER




DESIGNATION

I5/ASY= Asymmetric Directional Louver (use with general distribution reflector)

DESCRIPTION

Can be oriented in either direction for flexibility

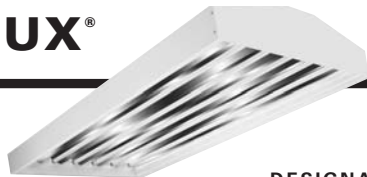

	DESIGNATION	DESCRIPTION
OPEN	Blank= No Guard	For maximum light output



	DESIGNATION	DESCRIPTION
PRISMATIC & CLEAR ACRYLIC LENS & ALUMINUM DOORFRAME	HB-FRM/LENS= Prismatic Acrylic Lens & Doorframe for HB (use with general distribution reflector)	
	2HB-FRM/LENS= Prismatic Acrylic Lens & Doorframe for 2HB (use with general distribution reflector)	
	HB-FRM/CL= Clear Acrylic Lens & Doorframe for HB	
	2HB-FRM/CL= Clear Acrylic Lens & Doorframe for 2HB	



	DESIGNATION	DESCRIPTION
WIREGUARD	HB-FRM/WG= Frame and Wireguard for HB	A wide choice of acrylic lenses in a white extruded aluminum doorframe (G1 & G2 optional)
	2HB-FRM/WG= Frame and Wireguard for 2HB	
	HB-FRM/LENS/WG= Frame and Prismatic Acrylic Lens with Wireguard	
	2HB-FRM/CL/WG= Frame and Clear Lens with Wireguard	
	HB-FRM/DROP WG= Frame and Drop Wireguard for HB	
	2HB-FRM/DROP WG= Frame and Drop Wireguard for 2HB	



	DESIGNATION	DESCRIPTION
HEAVY DUTY STOCK WIREGUARD	SWG/2HB-4FT-B= Heavy Duty Wireguard for field installation.	Finished in white
	SWG/HB-4FT-B= Heavy Duty Wireguard for field installation.	

